


# 电控永磁吸盘(DYZ50密集型/DYZ70强力型)

ELECTRO PERMANENT MAGNETIC CHUCK (DYZ50/DYZ70)

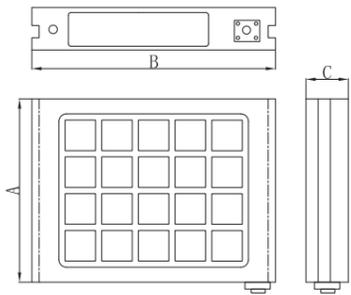


### 产品用途 / Application

适用于CNC切削中心, 铣床, 龙门铣床等切削作业。  
For CNC milling center, milling machines, planomiller.

### 产品特性 / Product Features

- 本体与面板一体加工, 极佳的钢特性,
- 精度高且稳定。
- 永久磁铁吸附工件, 没有停电的危险性。
- 可配合定制导磁块, 针对异形工件。
- 防水效果佳, 保证不渗水, 不漏电。
- 每极最大磁吸力可达350kgf以上。
- The body and plate are processed integrally, excellent steel character
- high precision and stable.
- permanent magnet attract workpiece, no danger if out of electricity.
- Irregular workpiece can be held with assistance of custom-made padding block.
- Waterproofness is good, no water seepage, no electric leakage.
- Max holding force of each pole can reach to 350kgf.

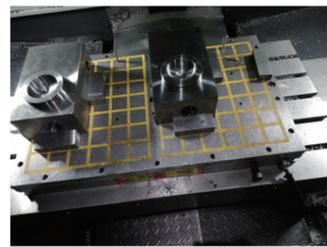

型号	外形尺寸 (mm)			磁极数		重量 (kg)
	A	B	C	50	70	
DYZ50-2540	250	430	68	18	8	52
DYZ50-2560	250	600	68	24	12	72
DYZ50-2580	250	810	68	33	16	99
DYZ50-25100	250	1000	68	42	20	120
DYZ50-3030	300	310	68	16	9	47
DYZ50-3040	300	430	68	24	12	65
DYZ50-3050	300	500	68	24	15	80
DYZ50-3060	300	600	68	32	18	90
DYZ50-3080	300	810	68	44	24	123
DYZ50-30100	300	1000	68	56	30	151
DYZ50-4040	420	430	68	36	16	92
DYZ50-4050	420	500	68	42	20	105
DYZ50-4060	420	600	68	48	24	126
DYZ50-4080	420	810	68	66	32	173
DYZ50-40100	420	1000	68	84	40	211
DYZ50-5060	500	590	68	56	30	144
DYZ50-5080	500	810	68	77	40	197
DYZ50-50100	500	1000	68	98	50	241
DYZ50-6060	600	600	68	64	36	180
DYZ50-6080	600	810	68	99	48	246
DYZ50-60100	600	1000	68	126	60	301
DYZ50-8080	800	810	68	121	72	310

# 线轨电永磁

LINE RAIL ELECTRIC PERMANENT MAGNET CHUCK



### 产品用途 / Application

适用于高精度线轨或长条型工件铣销、研磨等精密加工使用。  
Suitable for precision machining such as milling and grinding of high-precision track or long strip workpieces

### 产品特性 / Product Features

1. 最高吸磁力达到16kgf/cm<sup>2</sup>。
2. 电控永磁式结构设计, 使用时无须持续供电。
3. 无温升, 可长时间使用, 不会因为温度升高导致工作变形。
4. 导磁块可以替换使用。
5. 各种规格可以根据客户要求定制。
1. The maximum clamping force reaches 16kgf/cm<sup>2</sup>.
2. The electrically controlled permanent magnet structure design eliminates the need for continuous power supply during use.
3. No temperature rise, can be used for a long time, and will not deform due to temperature rise.
4. Magnetic blocks can be replaced.
5. Various specifications can be customized according to customer requirements.

型号	外形尺寸(mm)				电压 (单相)	控制器
	L	W	H	A		
DYZXG-100*4080	1020*4	100	105	23	AC 380V	已含 included
DYZXG-120*4080	1020*4	120	105	23		
DYZXG-100*4120	1030*4	100	115	23		
DYZXG-120*4120	1030*4	120	115	23		

(本系列皆为特制品, 以上规格仅供参考。This series is all special products, and the above specifications are for reference only)